

Default Guideline Values (DGVs) for Aquatic Ecosystems of the Huon Catchment

August 2021



ENVIRONMENT PROTECTION AUTHORITY

Publishing Information

Citation:

Environment Protection Authority (2021) *Default Guideline Values (DGVs) for Aquatic Ecosystems of the Huon Catchment*, Environment Protection Authority, Hobart, Tasmania.

Date:

August 2021

Enquiries:

Environment Protection Authority

GPO Box 1550

Hobart, Tasmania 7001

Telephone: (03) 6165 4599

Email: Enquiries@epa.tas.gov.au

Web: www.epa.tas.gov.au

Copyright:

© The Crown of Tasmania

Disclaimer:

The information provided in this document is provided in good faith. The Crown, its officers, employees and agents do not accept liability however arising, including liability for negligence, for any loss resulting from the use of or reliance upon the information in this document and/or reliance on its availability at any time.

ISBN-13:

978-1-74380-112-3

Table of Contents

Introduction.....	4
Protected Environmental Values (PEVs) – Community Values.....	4
Default Guideline Values.....	5
Ecosystem Condition.....	5
Regionalisation of inland waters by Surface Water Catchment.....	6
Deriving DGVs for aquatic ecosystems of the Huon Catchment.....	7
HEV DGVs for aquatic ecosystems of the Huon Catchment.....	10
SMD DGVs for aquatic ecosystems of the Huon Catchment.....	13
Appendix A: DGVs summary for aquatic ecosystems of the Huon Catchment.....	16
Appendix B: Precautionary approach for recreational waters microorganisms.....	18

Introduction

Water quality management, determination of water quality guideline values, and the setting of water quality objectives is guided by the *Australian and New Zealand Guidelines for Fresh and Marine Water Quality 2018 (ANZG 2018)* and the *National Water Quality Management Strategy 1994 (NWQMS)*.

The *State Policy on Water Quality Management 1997 (SPWQM)* establishes a framework that is compatible and consistent with these national guidelines.

The default guideline values (DGVs) for aquatic ecosystems presented herein have been derived for the Huon Catchment in accordance with the [NWQMS](#).

Protected Environmental Values (PEVs) – Community Values

As part of the implementation of the State Policy, protected environmental values for inland waters were determined through extensive stakeholder consultation and identification of community values and uses. The PEVs for inland waters were set for 22 areas on the basis of catchment boundary or municipal boundary. These are available via the [EPA website](#).

The current PEVs for inland waters for the protection of aquatic ecosystems provide options for both pristine and modified systems:

A: Protection of Aquatic Ecosystems

- (i) Pristine or nearly pristine ecosystems

(Having regard for the management objectives for nature recreation areas, conservation areas and game reserves outlined in Schedule 4 of the *National Parks and Wildlife Act 1970*.)

OR

- (ii) Modified (not pristine) ecosystems
 - (i) from which edible fish, shellfish and crustacea are harvested

OR

- (ii) from which edible fish, shellfish and/or crustacea are not harvested

B. Recreational Water Quality & Aesthetics

- (i) Primary contact water quality (specify sites)
- (ii) Secondary contact water quality
- (iii) Aesthetic water quality

C. Raw Water for Drinking Water Supply

- (i) Subject to coarse screening plus disinfection

D. Agricultural Water Uses

- (i) Irrigation
- (ii) Stock watering

E. Industrial Water Supply

That is, as a minimum, water quality management strategies should seek to provide water of a physical and chemical nature to support a pristine/modified aquatic ecosystem from which edible fish, crustacea and shellfish may be harvested; that is suitable as a raw water for drinking water supply subject to coarse screening plus disinfection; that is acceptable for irrigation and stock watering purposes; which will allow people to safely engage in primary contact recreation activities such as swimming at specific sites (refer to Appendix B) and secondary contact recreation activities such as paddling or fishing in aesthetically pleasing waters; and which is suitable for industrial water supply, e.g., use by aquaculture (shellfish farms) in marine farming zones.

For a detailed explanation on the PEVs as they relate to land tenure and a spatial presentation of the land tenure refer to the [Environmental Management Goals for Tasmanian Surface Waters Huon Valley Catchments Feb 2003](#) and [PEVs map](#), respectively.

Default Guideline Values

Guideline values apply to key indicators and are numerical concentrations or descriptive statements recommended for the support and maintenance of the designated water use or value, i.e. the Protected Environmental Value (PEV).

Tasmania refers to the following national level guideline values for the relevant key indicators.

- [Water Quality management Framework](#)
- [Toxicant DGVs in freshwater and marine water](#)
- [Water quality for primary industries](#)
- [Australian guidelines for water recycling](#)
- [Australian Drinking Water guidelines](#)
- [Guidelines for Managing Risks in Recreational water](#)
- [Cultural and spiritual values of waterways](#)
- [Food Standards](#)

The primary focus within Tasmania has been the derivation of guideline values for Aquatic Ecosystems based on Tasmanian data for key indicators of interest. This is as the protection of aquatic ecosystems is a PEV common to all water types. In addition, the trigger values for aquatic ecosystems from the ANZECC 2000 water quality guidelines were based on a very limited quantity of Tasmanian data.

Ecosystem Condition

The ANZG 2018 provides a framework for developing water quality guideline values based on the water type, health of aquatic ecosystems or ecosystem condition. Ecosystem condition can be viewed as a continuum ranging from natural to highly disturbed or artificial. The ANZG 2018 identifies three broad categories of ecosystem: High Ecological Value (HEV), Slightly to Moderately Disturbed (SMD) and Highly Disturbed (HD). To better characterise Tasmanian ecosystems the SMD category has been further divided into Slightly Modified Ecological Value (SMEV) and Moderately Disturbed (MD) (Figure 1).

For the decision process and selection criteria for identifying ecosystem condition refer to the EPA document, [Technical Guidance for Water Quality Objectives \(WQOs\) Setting for Tasmania](#).

Ecosystem condition continuum

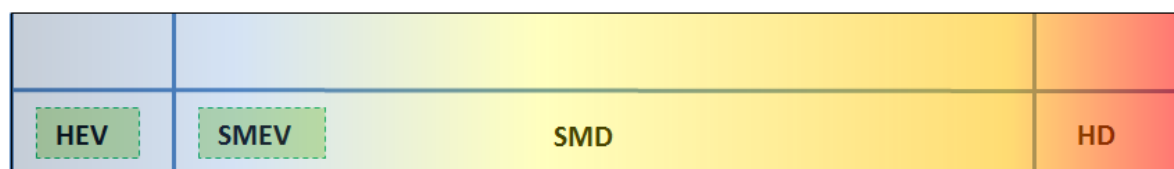


Figure 1. Ecosystem condition continuum showing HEV and SMEV reference categories.

Regionalisation of inland waters by Surface Water Catchment

The state water quality DGVs for aquatic ecosystems are based on data from across the entire state. To refine this a hydrological regionalisation approach as been adopted that is based on river flow information (Hughes, 1987). This has been further refined by regionalisation based on surface water catchment. The hydrologically distinct groupings (Figure 2). Links to regional documents are provided in and the associated surface water catchments are listed in Table I.

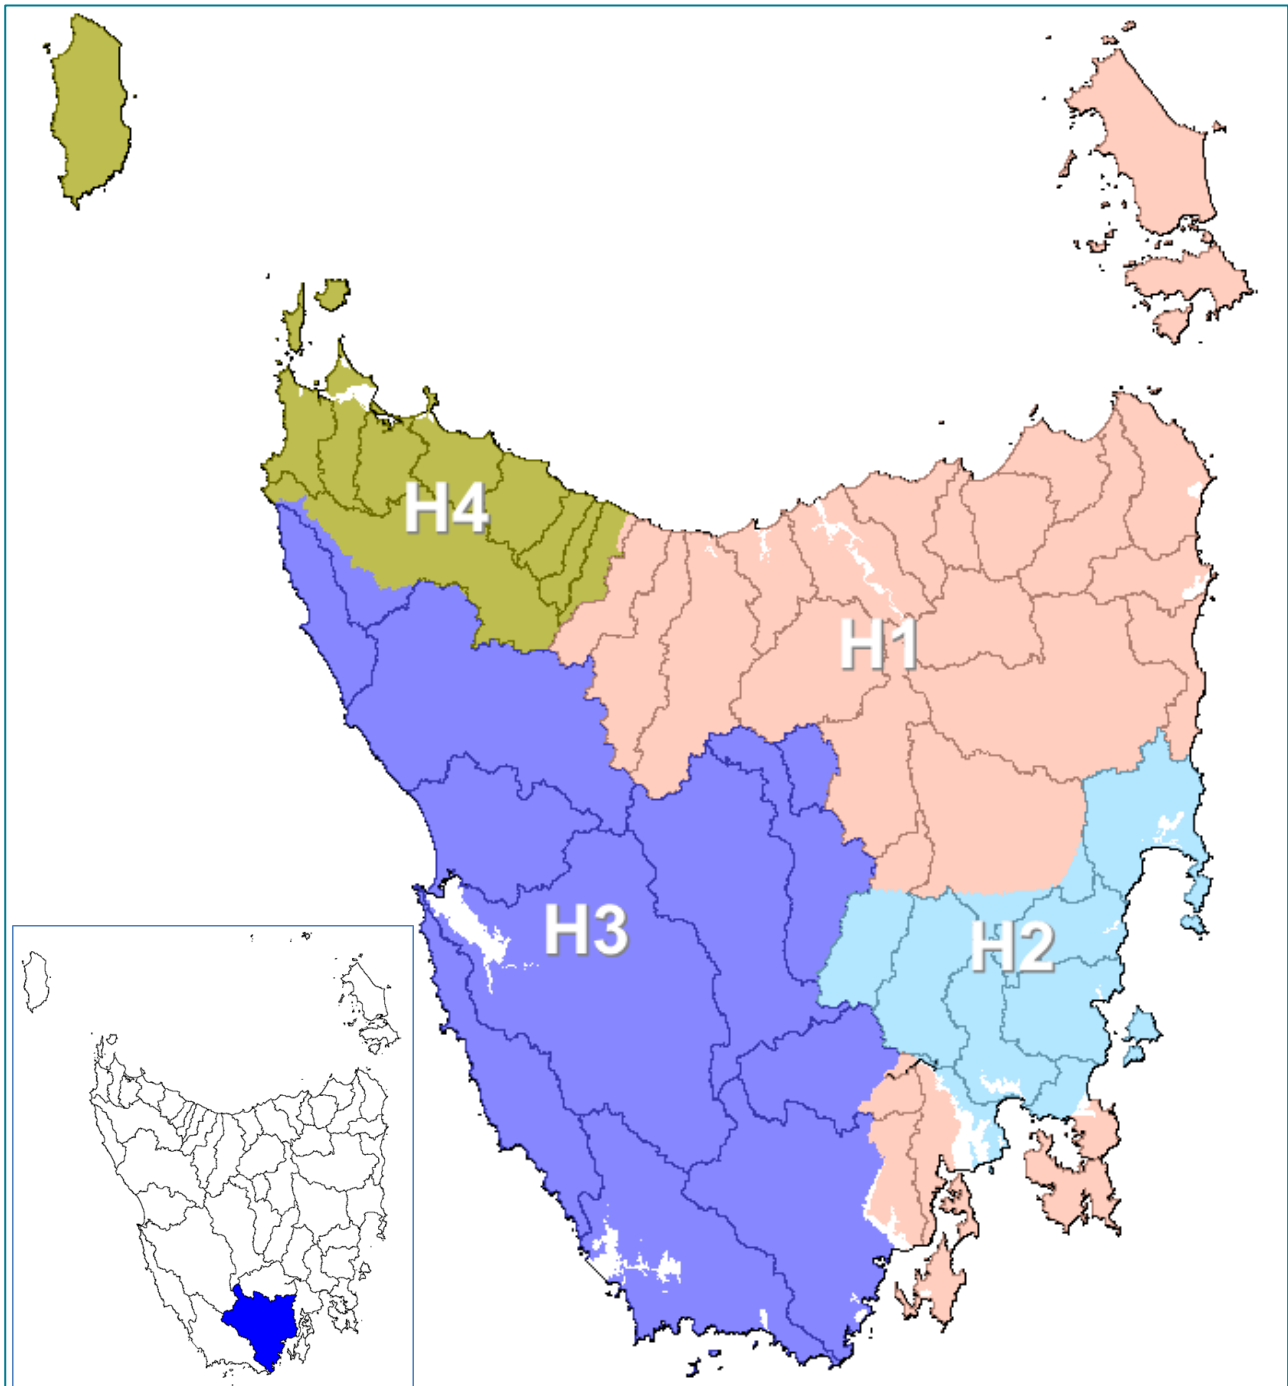


Figure 2. Hydrological regions (Hughes, 1987) and topographic catchments (Huon highlighted on inset).

Table 1. Hydrological region and associated catchments

Hydrological Region	Catchment
<u>Hydrological Region 1 (H1)</u>	The Leven, Mersey, Meander, Rubicon, Tamar Estuary, Brumbys-Lake, South Esk, North Esk, Pipers, Little Forester, Great Forester-Brid, Ringarooma, Boobyalla-Tomahawk, George, Great Musselroe-Ansons, and Scamander-Douglas catchments are entirely within the H1 hydrological region. The Macquarie, Tasman, Huon, Clyde, Lower Derwent and Derwent Estuary-Bruny catchments are deemed to be partly within the H1 and partly within the H3 or H2 Hydrological regions.
<u>Hydrological Region 2 (H2)</u>	The Swan-Apsley, Little Swanport, Prosser, Pitt water-Coal and Jordan catchments are entirely within the hydrological region. The Tasman, Derwent Estuary – Bruny, Clyde and Macquarie catchments are deemed to be partly within the H2 and partly within the H1 Hydrological region. The Lower Derwent catchment is predominantly within the H3 region, but also has river sections that have been deemed to belong to the H1 and H2 hydrological regions. The river sections of the Lower Derwent catchment belonging to the H2 hydrological region are between Upper Dromedary and Bridgewater.
<u>Hydrological Region 3 (H3)</u>	The Ouse, Great Lake, Upper Derwent, Gordon-Franklin, Port Davey, Wanderer-Giblin, King-Henty and Pieman catchments are entirely within the hydrological region. The Huon and Lower Derwent catchments are predominately within H3 but also partly within the H1 hydrological region. While the Arthur catchment is only partly within H3 and predominantly within the H4 hydrological region.
<u>Hydrological Region 4 (H4)</u>	The Blythe, Emu, Cam, Inglis-Flowerdale, Black-Detention, Duck, Montagu, Welcome and King Island catchments are entirely within the hydrological region. The Arthur catchment is deemed to be predominantly within the H4 and only partly within the H3 hydrological region.

Deriving DGVs for aquatic ecosystems of the Huon Catchment

For the development of water quality DGVs 42 sites were available within the Huon Catchment. Of these 36 sites were within the HEV ecosystem category and 6 sites were within the SMD ecosystem category (Table 2). For the development of biological DGVs 35 sites were available within the Huon Catchment. Of these 30 sites were within the HEV ecosystem category, and 5 sites were within the SMD ecosystem category (Table 2).

Table 2. Sites used to develop water quality and biological DGVs within the Huon Catchment

Site	HEV WQ	HEV BIOL	SMD WQ	SMD BIOL
Arve River (Haymons)	√			
Arve River at Arve Ford Crossing		√	√	
Arve River at Arve Rd	√	√		
Arve River (Upper)	√			
Bren	√			
Castle Forbes Rivulet at Bay Link		√		
Cook Creek at Picton Road		√		
Crabtree Rivulet at Mitchells Road		√		
Creekton Rivulet at Creekton Road		√		
Crystal Creek at South Weld Road	√	√		
D'Entrecasteaux River at South Cape Road		√		
Esperance River (at Dover water supply intake)			√	
Esperance River at Esperance River Road		√		
Esperance Trib off Esperance River Road		√		

Site	HEV WQ	HEV BIOL	SMD WQ	SMD BIOL
Esperance River (Upper)	√			
Farmhouse Creek at Picton Road		√		
Garden Island Creek at Garden Island Creek				√
Garden Island Creek off Garden Island Creek Road		√		
Glovers Creek 1	√			
Glovers Creek 2	√			
Hawkers Creek (Upper)	√			
Hawkers Creek (Lower)	√			
Hot Springs Creek at North Lune Road		√		
Huon River above Frying Pan Creek	√			
Huon River 800m downstream of Southwood Road	√			
Huon River (at Judbury)			√	
Huon River at Tahune Bridge	√			
Huon River upstream of Arve River confluence	√			
Isabella Creek off South Weld Road	√	√		
Johns Creek	√			
Judds Creek upstream of Judbury		√		
Kellaways Creek at Halls Track Road				√
Keoghs Creek at Arve Road		√		
Kermandie River at Oigles Road	√	√		
Kermandie River (Upper)	√			
King Creek	√			
King Creek (upstream of Huon River)			√	
Kroanna Creek at Manuka Road	√	√		
Laurel Creek	√			
Leighs Creek	√			
Little Denison River at Denison Road				√
Little Denison River (at Link Road)	√			
Little Denison River at McDougalls Road		√		
Little Denison River (off top of Denison Road)	√			
Lune River (Lower)	√			
Lune River (Upper)	√			
Mesa Creek at North Lune Road		√		
Mountain River upstream of Trestle Creek		√		
Mountain River at Mountain River Road				√
Nicholls Rivulet at Smiths Road		√		
Peak Rivulet off Peak Rivulet Road		√		
Picton River at Riveaux Road	√	√		
Picton River downstream of Farmhouse Creek	√	√		
Russell River at Denison Road				√
Russell River at Russell Pimple	√	√		
Russell River at Russell Road		√		
Russel River (Upper)	√			
South Creek upstream of Kermandie River		√		
Stringer Creek (lower)			√	

Site	HEV WQ	HEV BIOL	SMD WQ	SMD BIOL
Swanson Creek	√			
Tahune	√			
Tomalah Creek at Manuka Road	√	√		
Top King 2			√	
Upper King	√			
Warra Creek at Warra Road	√	√		
Warra Creek 2	√			

The parameters or indicators measured at a site are dependent on the water type and the question being asked by the monitoring program. For inland water the indicators that were widely monitored (spatially and temporally) were selected for the derivation of DGVs for aquatic ecosystems (Table 3.).

Table 3. Indicators for which DGVs were derived for inland waters

Water Type	Indicator
Inland	<ul style="list-style-type: none"> • Physico-chemical: Dissolved Oxygen, Conductivity pH, Turbidity and, Water Temperature. • Nutrients: TAN (NH₃ and NH₄⁺), Nitrate, Nitrite, Total Nitrogen, Dissolved Reactive Phosphorus, Total Phosphorus and, Total Suspended Solids (TSS). • Biological: AUSRIVSA Band, OE50, OE50Signal, Signal Index, Taxon Diversity, EPT Diversity, and Macroinvertebrate Composition, Fish O/E, Fish O/P, Proportion native fish abundance, proportion native fish species, proportion native biomass, Chlorophyll a, algal cover and riparian shading*

Where possible water quality data collected at times of no flow or during times of flood (over bank full) have been excluded in the derivation of the water quality DGVs. On this basis it can be taken that the WQ DGVs represent base flow conditions, i.e. flow conditions that occur 98 percent of the time within waterways. For the decision process and selection criteria for identifying flow conditions refer to the EPA document, [Technical Guidance for Water Quality Objectives \(WQOs\) Setting for Tasmania](#).

The minimum sample number required to determine percentile values with at least 95% confidence for WQ DGVs are as follows: 6 samples for 50th percentile; 14 samples for 20th and 80th percentiles; 29 samples for 10th and 90th percentiles; and 35 samples for 5th and 95th percentiles. In instances where there is insufficient data for a given key indicator the national WQ DGVs can be used.

For biological indicators a minimum of six combined season AUSRIVAS outputs have been used to generate percentile values to provide a level of statistical robustness for biological DGVs. For details on biological indicators for inland waters refer to the EPA document, [Technical Guidance for Water Quality Objectives \(WQOs\) Setting for Tasmania](#)

The tables overleaf of physico-chemical indicators report the DGVs for aquatic ecosystems of the Huon Catchment (shaded values) for HEV and SMD ecosystem categories on an annual and seasonal basis. Additional percentile values have been included for comparative purposes. The DGVs are summarised in Appendix A.

HEV DGVs for aquatic ecosystems of the Huon Catchment

The HEV water quality DGVs (Tables 4 to 8 shaded values) have been derived from 36 HEV sites within the catchment.

Table 4 Full year

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	9.1	9.2	9.6	10.8	12.0	12.5	12.8	42
Dissolved Oxygen % Saturation	91.9	95.2	96.4	100.1	104.4	105.7	107.7	41
Field Cond @ TRef25 µS/cm	33.3	37.5	42.3	52.4	73.4	91.5	118.4	6172
pH field - sensor TC	5.1	5.5	5.8	6.4	6.8	7.0	7.1	6173
Turbidity NTU	0.3	0.5	0.9	2.0	4.8	8.2	13.4	5622
Temperature (Celsius)	4.0	5.0	6.0	8.0	11.5	13.0	14.5	5666
TAN as N mg/L	0.004	0.004	0.006	0.010	0.016	0.018	0.019	41
Nitrate as N mg/L	0.001	0.001	0.001	0.002	0.005	0.007	0.009	41
Nitrite as N mg/L	0.001	0.001	0.001	0.003	0.004	0.006	0.007	41
Total Nitrogen as N mg/L	0.111	0.127	0.150	0.200	0.295	0.389	0.453	294
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.003	0.004	0.006	40
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.006	0.009	0.014	0.017	409
Total Suspended Solids (1.5µm) mg/L*	5.000	5.000	5.000	5.000	5.000	5.000	5.000	15
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	0.500	3.000	7.000	10.150	358

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 5 Summer

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	8.8	9.1	9.2	9.6	10.3	10.5	10.8	13
Dissolved Oxygen % Saturation	95.9	96.4	97.0	100.1	101.8	103.9	104.9	13
Field Cond @ TRef25 µS/cm	34.4	39.0	44.3	58.0	80.1	101.1	133.9	1653
pH field - sensor TC	5.3	5.6	6.0	6.5	6.9	7.1	7.3	1654
Turbidity NTU	0.3	0.4	0.8	1.9	4.4	7.2	12.4	1540
Temperature (Celsius)	5.2	7.0	9.0	11.5	14.0	15.0	17.0	1525
TAN as N mg/L	0.002	0.003	0.004	0.009	0.013	0.016	0.018	13
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.003	0.004	0.004	13
Nitrite as N mg/L	0.001	0.001	0.001	0.002	0.003	0.003	0.003	13
Total Nitrogen as N mg/L	0.107	0.120	0.141	0.200	0.333	0.382	0.411	87
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.002	0.003	0.003	0.003	13
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.006	0.009	0.013	0.015	114
Total Suspended Solids (1.5µm) mg/L*	5.000	5.000	5.000	5.000	5.000	5.000	5.000	4
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	0.500	3.000	7.000	8.000	101

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 6 Autumn

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	9.0	9.5	10.1	11.2	11.8	12.1	12.3	14
Dissolved Oxygen % Saturation	84.2	88.3	95.6	99.5	104.2	107.2	109.9	14
Field Cond @ TRef25 µS/cm	35.3	39.8	44.3	54.8	75.8	95.6	119.6	1574
pH field - sensor TC	5.2	5.5	5.9	6.4	6.9	7.0	7.2	1574
Turbidity NTU	0.2	0.4	0.8	1.7	4.0	6.1	10.4	1351
Temperature (Celsius)	5.0	6.0	7.0	9.0	11.0	12.0	13.0	1464
TAN as N mg/L	0.005	0.006	0.007	0.011	0.015	0.017	0.018	14
Nitrate as N mg/L	0.001	0.001	0.001	0.002	0.005	0.007	0.008	14
Nitrite as N mg/L	0.001	0.001	0.001	0.004	0.005	0.007	0.007	14
Total Nitrogen as N mg/L	0.132	0.152	0.166	0.216	0.344	0.440	0.498	85
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.004	0.005	0.006	14
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.006	0.010	0.014	0.020	114
Total Suspended Solids (1.5µm) mg/L*	5.000	5.000	5.000	5.000	5.000	5.000	5.000	3
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	0.500	5.000	7.600	17.300	95

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 7 Winter

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	11.2	11.4	11.7	12.7	12.9	13.0	13.1	6
Dissolved Oxygen % Saturation	92.9	94.0	96.1	100.0	102.5	104.0	104.8	6
Field Cond @ TRef25 µS/cm	31.7	35.2	40.2	49.0	66.0	79.8	100.9	1416
pH field - sensor TC	5.0	5.4	5.7	6.2	6.6	6.8	6.9	1416
Turbidity NTU	0.4	0.6	1.0	2.3	5.9	10.2	15.3	1299
Temperature (Celsius)	3.0	4.0	4.5	6.0	7.1	8.0	9.0	1274
TAN as N mg/L	0.008	0.009	0.009	0.012	0.014	0.016	0.016	6
Nitrate as N mg/L	0.003	0.004	0.004	0.007	0.009	0.011	0.011	6
Nitrite as N mg/L	0.002	0.002	0.003	0.004	0.005	0.006	0.006	6
Total Nitrogen as N mg/L	0.159	0.167	0.184	0.210	0.278	0.296	0.346	53
Phosphorus, Dissolved Reactive as P mg/L	0.002	0.002	0.002	0.003	0.003	0.005	0.005	6
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.005	0.007	0.010	0.015	83
Total Suspended Solids (1.5µm) mg/L*	5.000	5.000	5.000	5.000	5.000	5.000	5.000	5
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	0.500	3.000	4.700	8.350	74

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 8 Spring

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	9.7	9.8	10.2	11.7	12.1	12.3	12.4	9
Dissolved Oxygen % Saturation	96.9	97.4	98.1	100.5	105.0	106.5	107.8	8
Field Cond @ TRef25 µS/cm	32.4	36.4	40.9	50.0	68.6	84.9	113.1	1529
pH field - sensor TC	5.1	5.4	5.8	6.3	6.7	6.9	7.0	1529
Turbidity NTU	0.4	0.6	1.0	2.2	5.2	8.8	14.8	1432
Temperature (Celsius)	5.0	5.0	6.0	8.0	10.0	11.0	12.0	1403
TAN as N mg/L	0.005	0.005	0.006	0.008	0.019	0.019	0.019	8
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.003	0.005	0.005	8
Nitrite as N mg/L	0.001	0.001	0.001	0.003	0.004	0.005	0.006	8
Total Nitrogen as N mg/L	0.111	0.120	0.130	0.162	0.216	0.350	0.408	69
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.003	0.003	0.004	7
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.007	0.010	0.015	0.019	98
Total Suspended Solids (1.5µm) mg/L*	5.000	5.000	5.000	5.000	5.000	5.000	5.000	3
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	0.500	3.000	6.000	9.650	88

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

The HEV biological DGVs detailed in Table 9 have been derived from 30 HEV sites across the catchment.

Table 9 Data Summary and biological DGVs (shaded) for HEV ecosystems of the Huon Catchment

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
AUSRIVAS Band#	A	A	A	A	A	X	X	63
OE50#	0.91	0.92	0.96	1.06	1.13	1.16	1.16	63
OE50Signal#	0.98	0.99	0.99	1.00	1.02	1.04	1.04	63
Signal Index	6.1	6.2	6.3	6.5	6.6	6.7	6.7	64
Taxon Diversity	22	24	25	29	32	34	35	64
EPT Diversity	11	11	12	13	15	16	17	64
Macroinvertebrate composition	0.41	0.43	0.44	0.48	0.52	0.54	0.55	64

Based on combined season AUSRIVAS outputs.

SMD DGVs for aquatic ecosystems of the Huon Catchment

The SMD water quality DGVs (Tables 10 to 14 shaded values) have been derived from 6 SMEV sites within the catchment.

Table 10 Full year

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	8.9	9.2	9.8	10.9	12.1	12.6	12.9	131
Dissolved Oxygen % Saturation	89.2	91.3	95.9	99.9	104.0	106.4	107.8	128
Field Cond @ TRef25 µS/cm	53.3	56.7	60.9	72.5	112.9	150.1	283.6	597
pH field - sensor TC	5.6	5.8	6.1	6.6	7.0	7.2	7.4	590
Turbidity NTU	1.0	1.1	1.5	2.8	9.3	19.0	42.2	584
Temperature (Celsius)	5.0	5.5	6.5	9.0	13.1	15.0	16.5	615
TAN as N mg/L	0.003	0.004	0.006	0.009	0.013	0.016	0.018	138
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.003	0.005	0.008	138
Nitrite as N mg/L	0.001	0.001	0.001	0.002	0.004	0.005	0.007	136
Total Nitrogen as N mg/L	0.120	0.130	0.170	0.279	0.404	0.543	0.810	233
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.004	0.005	0.005	136
Total Phosphorus as P mg/L	0.003	0.003	0.006	0.010	0.024	0.035	0.050	275
Total Suspended Solids (1.5µm) mg/L*	0.900	3.000	5.000	5.000	5.000	10.000	14.000	137
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	3.000	11.000	20.700	33.750	134

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 11 Summer

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	8.7	8.9	9.1	9.8	10.5	11.0	11.1	39
Dissolved Oxygen % Saturation	88.9	90.2	96.1	99.6	102.7	104.7	106.2	38
Field Cond @ TRef25 µS/cm	52.6	56.6	65.9	80.9	116.2	143.3	180.5	140
pH field - sensor TC	6.1	6.2	6.4	6.7	7.2	7.4	7.6	139
Turbidity NTU	0.7	1.0	1.1	2.0	6.6	12.4	27.9	138
Temperature (Celsius)	9.1	10.3	11.0	14.0	16.5	18.0	18.2	144
TAN as N mg/L	0.003	0.003	0.004	0.007	0.013	0.016	0.017	43
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.003	0.003	0.004	43
Nitrite as N mg/L	0.001	0.001	0.001	0.001	0.003	0.005	0.007	41
Total Nitrogen as N mg/L	0.110	0.122	0.144	0.210	0.380	0.571	0.894	63
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.002	0.004	0.004	0.004	43
Total Phosphorus as P mg/L	0.003	0.003	0.006	0.009	0.028	0.036	0.060	70
Total Suspended Solids (1.5µm) mg/L*	0.500	2.000	5.000	5.000	5.000	6.000	10.000	31
Total Suspended Solids (0.45µm) mg/L	0.650	1.600	3.000	9.000	15.200	20.400	42.900	27

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 12 Autumn

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	9.3	9.9	10.1	11.1	11.6	12.2	12.3	42
Dissolved Oxygen % Saturation	88.2	91.6	94.4	99.1	103.9	106.6	108.1	42
Field Cond @ TRef25 µS/cm	54.2	56.5	60.1	70.1	103.5	145.4	170.3	161
pH field - sensor TC	5.6	5.8	6.2	6.6	7.0	7.2	7.4	156
Turbidity NTU	0.7	1.0	1.3	2.3	7.1	13.9	18.5	152
Temperature (Celsius)	6.8	7.0	8.0	9.9	12.4	13.3	14.0	161
TAN as N mg/L	0.005	0.005	0.006	0.009	0.012	0.014	0.017	45
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.004	0.005	0.009	45
Nitrite as N mg/L	0.001	0.001	0.001	0.003	0.004	0.005	0.006	45
Total Nitrogen as N mg/L	0.120	0.130	0.170	0.242	0.345	0.442	0.482	64
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.004	0.004	0.005	45
Total Phosphorus as P mg/L	0.003	0.003	0.005	0.009	0.017	0.026	0.038	72
Total Suspended Solids (1.5µm) mg/L*	0.825	2.300	4.600	5.000	5.000	5.000	8.150	34
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	5.000	12.000	16.600	25.650	28

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 13 Winter

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	11.2	11.6	12.1	12.7	13.0	13.3	13.6	19
Dissolved Oxygen % Saturation	92.6	96.2	97.2	101.8	105.5	105.9	106.5	19
Field Cond @ TRef25 µS/cm	54.4	56.5	59.8	68.8	111.7	149.6	310.8	150
pH field - sensor TC	5.5	5.6	5.9	6.3	6.7	6.9	7.2	150
Turbidity NTU	1.3	1.6	2.0	3.8	13.1	26.8	50.6	148
Temperature (Celsius)	4.0	4.0	5.0	6.0	7.0	8.0	8.8	151
TAN as N mg/L	0.006	0.007	0.007	0.012	0.015	0.017	0.018	19
Nitrate as N mg/L	0.001	0.001	0.001	0.002	0.007	0.010	0.017	19
Nitrite as N mg/L	0.001	0.001	0.001	0.003	0.006	0.006	0.007	19
Total Nitrogen as N mg/L	0.135	0.166	0.246	0.354	0.530	0.810	0.987	47
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.002	0.002	0.003	0.004	0.005	0.006	19
Total Phosphorus as P mg/L	0.003	0.003	0.003	0.014	0.028	0.037	0.053	60
Total Suspended Solids (1.5µm) mg/L*	3.000	4.500	5.000	5.000	10.000	10.000	18.500	46
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	3.000	7.000	15.200	22.100	39

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

Table 14 Spring

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
Dissolved Oxygen mg/L	9.3	9.5	10.1	11.3	12.1	12.3	12.5	31
Dissolved Oxygen % Saturation	90.0	93.3	97.0	99.8	104.0	107.1	109.1	29
Field Cond @ TRef25 µS/cm	53.9	57.3	62.2	74.5	113.2	183.9	621.5	146
pH field - sensor TC	5.5	5.8	6.0	6.6	6.9	7.1	7.3	145
Turbidity NTU	1.3	1.6	2.1	3.6	10.2	23.1	59.8	146
Temperature (Celsius)	5.5	6.4	7.0	9.0	11.0	13.0	14.1	159
TAN as N mg/L	0.005	0.005	0.006	0.009	0.012	0.014	0.019	31
Nitrate as N mg/L	0.001	0.001	0.001	0.001	0.002	0.003	0.004	31
Nitrite as N mg/L	0.001	0.001	0.001	0.003	0.004	0.004	0.005	31
Total Nitrogen as N mg/L	0.130	0.145	0.170	0.277	0.394	0.469	0.620	59
Phosphorus, Dissolved Reactive as P mg/L	0.001	0.001	0.001	0.003	0.005	0.005	0.005	29
Total Phosphorus as P mg/L	0.003	0.003	0.006	0.010	0.022	0.026	0.047	73
Total Suspended Solids (1.5µm) mg/L*	1.500	3.500	5.000	5.000	5.000	11.500	12.000	26
Total Suspended Solids (0.45µm) mg/L	0.500	0.500	0.500	2.250	8.200	22.100	41.400	40

* State derived values, TAN=Total Ammonia Nitrogen (NH₃ and NH₄⁺).

The SMD biological DGVs detailed in Table 15 have been derived from 5 SMEV site within the catchment.

Table 15 Data Summary and biological DGVs (shaded) for SMD ecosystems of the Huon Catchment

Parameter	5 th %ile	10 th %ile	20 th %ile	Median	80 th %ile	90 th %ile	95 th %ile	Sample Number
AUSRIVAS Band#	A	A	A	A	A	A	A	6
OE50#	1.03	1.03	1.03	1.08	1.10	1.10	1.10	6
OE50Signal#	0.98	0.98	0.99	1.00	1.00	1.01	1.01	6
Signal Index	5.9	6.0	6.2	6.4	6.5	6.5	6.5	6
Taxon Diversity	25	26	27	28	30	31	31	6
EPT Diversity	12	12	13	14	16	17	17	6
Macroinvertebrate composition	0.46	0.46	0.46	0.50	0.56	0.57	0.57	6

Based on combined season AUSRIVAS outputs.

The SMD DGVs may represent aspirational DGVs for moderately disturbed ecosystems but apply when site-specific guideline values consistent with the NWQMS are not available.

Information from the Tasmanian River Condition Index (TRCI) project has been incorporated into the biological DGVs in order to provide guideline values for key biological indicators relating to invertebrate abundance, native fish, and algae. Details are provided in the EPA document, [Technical Guidance for Water Quality Objectives \(WQOs\) Setting for Tasmania](#).

A summary of the HEV and SMD DGVs from Table 4 to Table 15 are provided in Appendix A.

Appendix A: DGVs summary for aquatic ecosystems of the Huon Catchment.

HEV	Physico-chemical indicators and water quality DGVs for Aquatic Ecosystems																	
	DO (mg/L)		DO (% sat)		Cond	pH		Turb	Temp (°C)		TAN as N	NO ₃ as N	NO ₂ as N	Total N as N	DRP as P	Total P as P	TSS* (1.5 µm)	TSS (0.45 µm)
	lower	upper	lower	upper	(µs/cm)	lower	upper	NTU	lower	upper	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)
Annual	9.6	12.0	96.4	104.4	73.4	5.8	6.8	4.8	6.0	11.5	0.016	0.005	0.004	0.295	0.003	0.009	5.00	3.00
Summer	9.2~	10.3~	97.0	101.8	80.1	6.0	6.9	4.4	9.0	14.0	0.013~	0.003~	0.003~	0.333	0.003~	0.009	5.00~	3.00
Autumn	10.1	11.8	95.6	104.2	75.8	5.9	6.9	4.0	7.0	11.0	0.015	0.005	0.005	0.344	0.004	0.010	5.00~	5.00
Winter	11.7~	12.9~	96.1~	102.5~	66.0	5.7	6.6	5.9	4.5	7.1	0.014~	0.009~	0.005~	0.278	0.003~	0.007	5.00~	3.00
Spring	10.2~	12.1~	98.1~	105.0~	68.6	5.8	6.7	5.2	6.0	10.0	0.019~	0.003~	0.004~	0.216	0.003~	0.010	5.00~	3.00

NB: DO (dissolved oxygen), Cond (electrical conductivity), Turb (turbidity), TAN (total ammonia nitrogen), DRP (dissolved reactive phosphorus), TSS (total suspended solids) filtered through, e.g., 1.5 µm. * State derived values, ~ <95% confidence. Figures shown above are based on data from 36 HEV sites within the Huon Catchment unless noted otherwise in the table.

SMD	Physico-chemical indicators and water quality DGVs for Aquatic Ecosystems																	
	DO (mg/L)		DO (% sat)		Cond	pH		Turb	Temp (°C)		TAN as N	NO ₃ as N	NO ₂ as N	Total N as N	DRP as P	Total P as P	TSS* (1.5 µm)	TSS (0.45 µm)
	lower	upper	lower	upper	(µs/cm)	lower	upper	NTU	lower	upper	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)	(mg/L)
Annual	9.8	12.1	95.9	104.0	112.9	6.1	7.0	9.3	6.5	13.1	0.013	0.003	0.004	0.404	0.004	0.024	5.00	11.00
Summer	9.1	10.5	96.1	102.7	116.2	6.4	7.2	6.6	11.0	16.5	0.013	0.003	0.003	0.380	0.004	0.028	5.00	15.20
Autumn	10.1	11.6	94.4	103.9	103.5	6.2	7.0	7.1	8.0	12.4	0.012	0.004	0.004	0.345	0.004	0.017	5.00	12.00
Winter	12.1	13.0	97.2	105.5	111.7	5.9	6.7	13.1	5.0	7.0	0.015	0.007	0.006	0.530	0.004	0.028	10.00	7.00
Spring	10.1	12.1	97.0	104.0	113.2	6.0	6.9	10.2	7.0	11.0	0.012	0.002	0.004	0.394	0.005	0.022	5.00	8.20

NB: DO (dissolved oxygen), Cond (electrical conductivity), Turb (turbidity), TAN (total ammonia nitrogen), DRP (dissolved reactive phosphorus), TSS (total suspended solids) filtered through, e.g., 1.5 µm. * State derived values, ~ <95% confidence. Figures shown above are based on data from 6 SMEV sites within the Huon Catchment unless noted otherwise in the table.

Biological Condition	Biological indicators and biological DGVs for Aquatic Ecosystems													
	AUSIVAS band		OE50		OE50 Signal		Signal Index		Taxon Diversity		EPT Diversity		Macroinvertebrate Composition	
	lower	upper	lower	upper	lower	upper	lower	upper	lower	upper	lower	upper	lower	upper
HEV	A	A	0.96	1.13	0.99	1.02	6.3	6.6	25	32	12	15	0.44	0.52
SMD	A	A	1.03	1.10	0.99	1.00	6.2	6.5	27	30	13	16	0.46	0.56

Figures shown above are based on data from 30 HEV sites and 5 SMEV within the Huon Catchment.

Appendix B: Precautionary approach for recreational waters microorganisms

For recreational waters microorganisms are used as a regulatory parameter of public health significance. The indicator organism used for microbiological water quality assessment is intestinal enterococci and is related to a risk matrix which uses sanitary inspection of potential faecal contamination sources and 95th percentile levels of enterococci/100mL. The Public Health Act 1997 Recreational Water Quality Guidelines (Tasmania 2007) for a general water body (where no sanitary risk assessment has been undertaken) has determined microbial levels for investigation and action to informing the public of the elevated public health risk. These levels are at enterococci counts in a single water sample greater than 140 enterococci/100mL and when two consecutive water samples results are greater than 280 enterococci/100mL.

A precautionary approach is however recommended by the EPA, being that microbial levels should be at 40 enterococci/100mL or less and this should be the DGV for this key indicator. Refer to the Australian Government Guidelines for Managing Risk in Recreational Water for more detail on the classification matrix for faecal pollution of recreational water and other key indicators DGVs.



ENVIRONMENT PROTECTION AUTHORITY